


TD-(530-550)MC-144HC

TD - INK

Tide solar redefines the high efficiency module range by combining 182mm cells with PERC and half cell technology.

The combination of innovative technology has effectively improved module efficiency and power output.

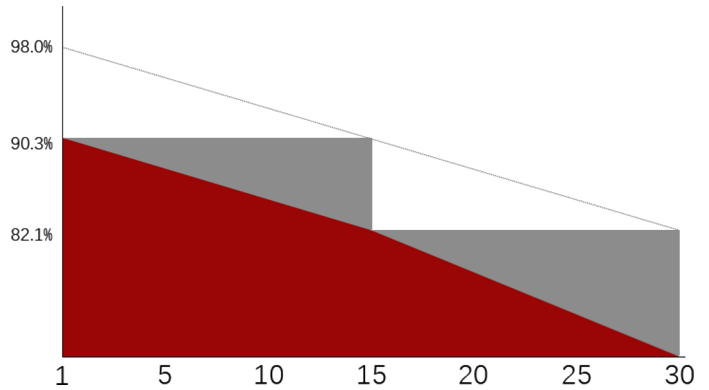


LINEAR PERFORMANCE WARRANTY

15 YEAR PRODUCT WARRANTY

30 YEAR LINEAR POWER WARRANTY

MODULE SIZE

2279x1134x35mm

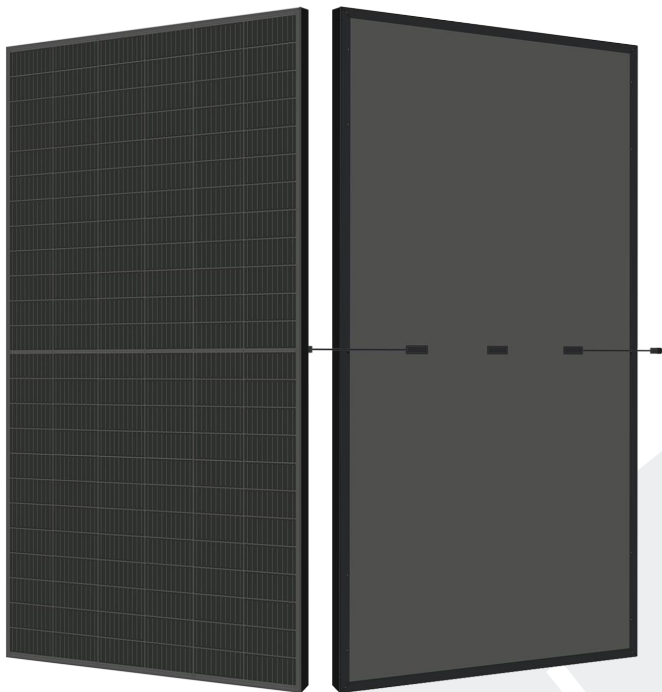

144 CELL
MONOCRYSTALLINE MODULE


530W-550W
POWER OUTPUT RANGE

21.28%
MAXIMUM EFFICIENCY

0 ~ +3%
POSITIVE POWER TOLERANCE



MAIN CHARACTERISTICS



Competitive Low Light Performance



LCOE BOS Reduced BOS & Increased ROI



Reduced Power Loss by Minimising the Effect of Shadow Shading



High Density Encapsulation




2400pa Wind Load
5400pa Snow Load



Multi-Busbar Technology

DIMENSIONS OF PV MODULE

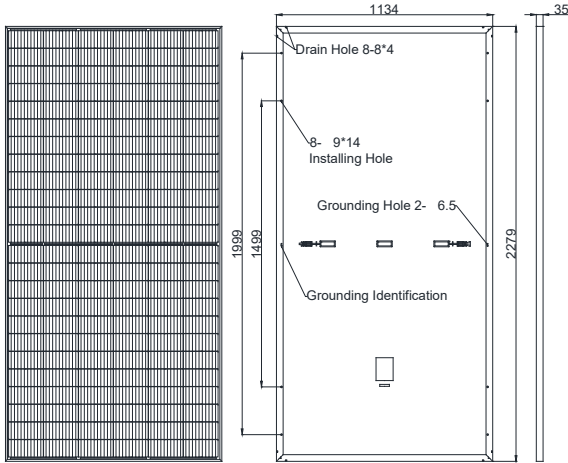

STRUCTURAL CHARACTERISTICS

Module Size	2279x1134x35mm
Weight	26kg
Cell	single crystal PERC182x91mm (144pieces)
Glass	3.2mm tempered coated glass, low iron
Frame	anodized aluminum alloy
Junction Box	IP68, 3 diodes
Output Lead	4.0mm ² 1200mm(+) / 1200mm(-) or customized
Mechanical Load	front 5400pa / back 2400pa

ELECTRICAL CHARACTERISTICS

Component Model	TD-530MC-144HC	TD-535MC-144HC	TD-540MC-144HC	TD-545MC-144HC	TD-550MC-144HC
Maximum Power (PMP)	STC 530	STC 535	STC 540	STC 545	STC 550
Open Circuit Voltage (VOC)	49.0	49.2	49.4	49.6	49.8
Short Circuit Current (ISC)	13.76	13.81	13.84	13.94	13.99
Maximum Power Voltage (VMP)	41.48	41.65	41.82	41.99	42.15
Maximum Power Current (IMP)	12.78	12.85	12.92	12.98	13.05
Component Efficiency (η_c)	20.56	20.76	20.95	21.14	21.28
Power Tolerance	(0, +3%)				
Maximum System Voltage	1500V DC				
Maximum Rated Fuse Current	25 A				
STC: Irradiance 1000 W/ m ² module temperature 25 °C AM=1.5					

TEMPERATURE CHARACTERISTICS

Maximum Power Temperature Coefficient	-0.35 % / °C
Temperature Coefficient Of Open Circuit Voltage	-0.27 % / °C
Temperature Coefficient Of Short Circuit Current	+0.05 % / °C
Working Temperature	-40 ~ +85 °C
Nominal Operating Cell Temperature (NOCT)	45 ± 2 °C

PACKING METHOD

Module Size	2279x1134x35mm
Container	40' HQ
Quantity Per Pallet	31
Number Of Pallets Per Container	20
Quantity Per Container	620

I-V Curve

